


PAIRING REMOTE CONTROL & SETTING TOP & BOTTOM LIMITS

6N HARDWIRED MOTOR

IMPORTANT: FAMILIARISE YOURSELF WITH THE OPERATIONAL BUTTON LOCATIONS BEFORE STARTING

BECOME FAMILIAR WITH THE CONTROL BUTTONS YOU WILL BE USING

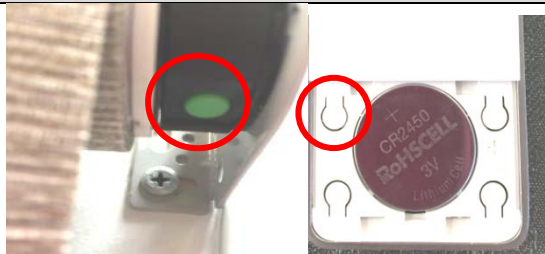

Button on Motor - Head is located on one end of the blind close to bracket

P2 button is located on the back of the remote control on the left hand side of the battery area


UP

STOP

DOWN

MULTI CHANNEL SELECTION

Please note: if you have a multi channel remote - that touch sensor is very sensitive - hold remote on outer edge to ensure channels do not change during setting up

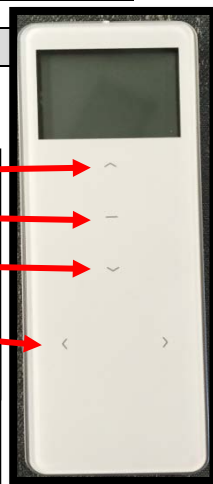

IMPORTANT: Before commencing each stage of set up, read through the stage completely a few times until you are familiar with the set up sequence as there is a time limit to complete each stage.


PAIRING REMOTE TO MOTOR

Press & release Button on Motor Head the blind will jog up and down release you will hear a beep
 Press P2 > Beep
 Press P2 again > Beep
 Press **Up or Down** see below table to pair motor and have fabric run in correct direction
 You will hear a beep and the blind will jog up and down.
 Your remote is now paired to the motor

MOTOR ON RIGHT & STANDARD ROLL – P2- P2 – UP
MOTOR ON RIGHT & REVERSE ROLL – P2 – P2 - DOWN
MOTOR ON LEFT & STANDARD ROLL – P2 – P2 – DOWN
MOTOR ON LEFT & REVERSE ROLL – P2 – P2 - UP

STANDARD ROLL – FABRIC RUNS TO BACK OF ROLLER

REVERSE ROLL – FABRIC RUNS TO FRONT OF ROLLER



**CHECK BLIND DIRECTION IS CORRECT WITH UP & DOWN CONTROLS
 IF INCORRECT YOU WILL NEED TO REVERSE DIRECTION**

TO REVERSE DIRECTION

Press & hold button on motor head until it has jogged up and down twice – **it will go up & down – there will be a pause then up & down again**
 Release button and you will hear a beep.
 Re check that blind is now running in correct directions if ok proceed to setting limits.

BEFORE SETTING LIMITS ROTATE BLIND UP AND DOWN TO SETTLE FABRIC

PAIRING REMOTE CONTROL & SETTING TOP & BOTTOM LIMITS

6N HARDWIRED MOTOR

ENTER LIMIT SETTING MODE

Press P2 (You will hear a beep)
Press Up (You will hear a beep)
Press P2 (The blind will jog up and down)

SET TOP LIMIT

Drive Blind up to desired position
Press stop
Press Stop button again & hold for 5 seconds (you will hear 5 beeps and the blind will jog up & down)
The top limit is now set

SET BOTTOM LIMIT

Drive Blind down to desired position
Press stop
Press stop button again & hold for 5 seconds (you will hear 5 beeps and the blind will jog up & down)
The bottom limit is now set

TO SET A MID SETTING (3rd LIMIT)

Drive blind to desired mid setting position
Press Stop
Press P2
Press Stop
Hold Stop button for 5 seconds (you will hear 5 beeps and the blind will jog up and down)
Your mid height setting (3rd limit) is now set

USING YOUR REMOTE

UP BUTTON – This will take your blind all the way up to set limit
DOWN BUTTON – This will take your blind all the way down to set limit
STOP BUTTON – When the blind is moving use stop button to stop the blind at any position between limits.
- When the blind is stationary press the stop button to activate blind up or down to mid setting.
CHANNEL BUTTON < - > If you have a multi channel remote select the channels using the left and right arrow buttons the channel number will appear in the window

TO CLEAR PAIRING AND SETTINGS

Press P2
Press Stop
Press P2
All settings for that channel will now be cleared